



INSOMNIAC™
720

Pedestal mount, outdoor. Maximum engagement and unparalleled reliability.

CONTRACTOR'S **GUIDE**

Installation specifications and considerations for your new INSOMNIAC Kiosk. Never miss another rental.

CONTACT US

Each INSOMNIAC™ Kiosk is a self-contained system designed for easy installation. An OpenTech onboarding specialist will work with you to set up and customize the more complex configuration options within the kiosk software. If you have questions throughout the installation process, please reach out to our dedicated support team.



CONTACT INFORMATION

Technical Support	(602) 773-1700 support@opentechalliance.com
Fax	(602) 324-8658
Office	(602) 749-9370



HOURS OF OPERATION

Business Office	M-F; 8:00AM to 5:00PM MST
Technical Support	M-F; 7:00AM to 5:00PM MST Sat; 7:00AM to 5:00PM MST

INSOMNIAC™ is a registered trademark of OpenTech Alliance, Inc. All configuration and/or installation references are appropriate practices within the U.S. Configuration and installation procedures vary by country and may result in the presence of components that differ in form and/or function from those shown in this document. Unless otherwise noted, all images, illustrations, content and all materials shown in this document are copyrights, trademarks and or intellectual properties, owned, controlled or licensed by OpenTech Alliance, Inc. This document may not be copied in whole or in part without the written consent of OpenTech Alliance, Inc. Copyright © 2019, OpenTech Alliance, Inc. all rights reserved.

TABLE OF CONTENTS

Preface.....	4	Heat Gain/Loss Consideration.....	6
General Installation.....	4	Protection from Weather.....	6
ADA Compliance.....	4	INSOMNIAC 720 Specifications.....	7
Accessibility Considerations.....	4	Weights and Measurements.....	7
Installation Specifications.....	4	Product & Installation Drawings.....	8
Concrete Pad Requirements.....	5	Model 720 Pedestal Base Layout.....	8
Power Requirements.....	5	Model 720 Concrete Pad Specifications....	9
Wired Power Specifications.....	5	Corner Mount Placement.....	9
Backup Power Supply.....	5	Model 720 Front View.....	10
Data Cable Requirements.....	6	Model 720 ISO View.....	11
DVR Camera Connection.....	6	Model 720 Right Side View.....	12
Plenum Ceiling Consideration.....	6	Model 720 Front ADA View.....	13
Fire Protection Consideration.....	6	Table of Figures.....	14



Looking for a local installer?

We train a network of OpenTech Authorized Dealers throughout the United States. Visit www.opentechalliance.com/dealers to find one near you!

INSTALLATION

Preface

Prior to installing the INSOMNIAC 720, your contractor should review the standards and information contained throughout this document. Please contact OpenTech Alliance Customer Support (via telephone at: 602-749-9370, Option 2, or email at: support@opentechalliance.com) for any upgrades or additional details or questions.

General Installation

- Check with OpenTech Alliance prior to installation for any updates to this installation guide.
- Check all applicable ADA and local codes for accessibility compliance prior to installation.
- The kiosk should be visible once a tenant enters the property from the street.
- The kiosk area should be well lit (to make the user feel safe and comfortable).
- The kiosk should be located on the exterior of the building and visible from the parking area.
- If the property utilizes video recording or surveillance, a camera should be in place to view the kiosk.
- The kiosk should offer the user protection from the elements during use; for example, shade from the hot sun and direct sunlight, and protection from rain and wind, etc.)
- Ideal installation of the kiosk will insure that it is placed just adjacent to the main office entry.
- The kiosk should be located as close to the entry keypad as possible.

ADA Compliance

Accessibility Considerations

The primary issue addressed by The Americans with Disabilities Act (and corresponding local accessibility code requirements), as applied to the kiosk, is provision for proper access to and from the INSOMNIAC 720 kiosk. This includes insuring the presence of an accessible route from public areas (including streets, sidewalks and parking lots).

Installation Specifications

It is suggested that the unit be installed at such a height so as to insure that the microphone is approximately 48" AFF (above finished floor); this will place the kiosk at a height that is accessible to an individual in a wheelchair (for both forward and side approaches). In order to further accommodate wheelchair accessibility, the lock dispenser should be installed so that access to the lock dispenser is approximately 28-1/2" AFF; this complies with guidelines set forth by the ADA.

Concrete Pad Requirements

The INSOMNIAC 720 must be mounted on a concrete pad. Four (4) bolts will need to be anchored into the pad with which the pedestal base is to be attached. Holes in the pedestal base allow for 3/8" bolts to be used (please follow the bolt manufacturer's recommendations when anchoring bolts in concrete). Please see Figure 1: Model 720 Pedestal Base Layout (page 11) for pedestal base layout, and Figure 2: Model 720 Concrete Pad Specifications (page 12) for concrete pad specifications.

Power Requirements

Wired Power Specifications

The INSOMNIAC kiosk requires 110-120 VAC, 10 Amp, single-phase, three-wire un-switched power receptacle. Wiring to the receptacle must include a third-wire earth-ground (conduit ground is not acceptable).

Extend a minimum of 3/4" metal conduit from service panel to a 4" junction box located no further than 6' from the unit. Boxes can be flush mounted with concealed conduit for new construction, or boxes can be surface mounted with exposed conduit for existing construction.

Although removing power from the kiosk suddenly is not recommended, the system is designed to be resilient against data corruption if power is removed.

Backup Power Supply

An uninterruptible power supply (UPS), also known as an uninterruptible power source, or a battery backup, is a device which maintains a continuous supply of electric power to connected equipment by supplying power from a separate source when utility power is not available.

When a power failure occurs, the UPS effectively switches from utility power to its own power source almost instantaneously. The UPS, which is continuously connected to the protected load, draws energy from its reserves, usually stored in lead-acid batteries, converting it to AC power.

In addition to providing protection against complete failure of the utility supply, a UPS also provides protection against all common power problems, and for this reason it is also known as a power or line "conditioner."

Please consult with your electrical contractor for a unit appropriate to your facility.

Data Cable Requirements

Always-On Internet Connectivity

The INSOMNIAC 720 must be connected to the Internet; i.e. an “always-on” Internet connection (such as cable or DSL). The firewall should allow incoming traffic on TCP ports 5721, 80, and 443.

A contractor should run one or two CAT 5 data cables, in grounded conduit, from the location of the computer (or network hub) that runs the management software, to a junction outlet box mounted a few feet from the kiosk. The kiosk comes with a CAT 5 cable that extends 5’ from a hole in the back, right-bottom corner of the kiosk (when facing the kiosk from the front).

A second CAT5 cable would be needed to serve an optional “pin hole” IP camera that can connect to the facility’s security monitoring system.

On-Demand/“Dial-Up” Internet Connectivity

The INSOMNIAC 720 does not support an on-demand Internet connection (such as dial-up). However, it can be configured to support connection to a cellular network.

DVR Camera Connection

The INSOMNIAC 720 comes pre-installed with a DVR (Digital Video Recorder) capable camera. If desired, an RG59 BNC cable may be run to the CAT5E junction box. The cable should be terminated with a female BNC connector or have a coupler available.

Plenum Ceiling Consideration

Special considerations must be made if the kiosk will utilize wiring installed through a plenum ceiling. If the area between the ceiling and the roof in a building is used for air return in a ventilation system, fire and building codes normally require that special wire or conduit be used if wire is run through this area.

Fire Protection Consideration

Installation of this kiosk in an existing facility with a new wall enclosure, may impact the sprinkler head cover in this area, and require modification or addition of additional heads.

Heat Gain/Loss Consideration

Installation of this kiosk in small areas with a lack of air circulation should take into consideration the heat gain (build up of heat from operation of the equipment) and design the space accordingly.

Protection from Weather

Although the INSOMNIAC kiosk is designed for outdoor use, it should be protected from full weather exposure. A canopy, awning or other covering should be installed above the kiosk to prevent direct rain and/or snow contact.

SPECIFICATIONS

INSOMNIAC 720 Specifications

Weights and Measurements

Shipping Weight	Unit Weight	Kiosk Dimensions	Rear Clearance
+/- 180 lbs	+/- 120 lbs	Height: 62 13/16" Width: 20 1/4" Depth: 14 25/32"	INSOMNIAC 720 opens to the front, therefore, no rear access clearance is required and the kiosk may be installed flush to a wall.
Actual shipping and unit weight depends upon shipping materials, options and configuration.			



DRAWINGS

Product & Installation Drawings

Model 720 Pedestal Base Layout

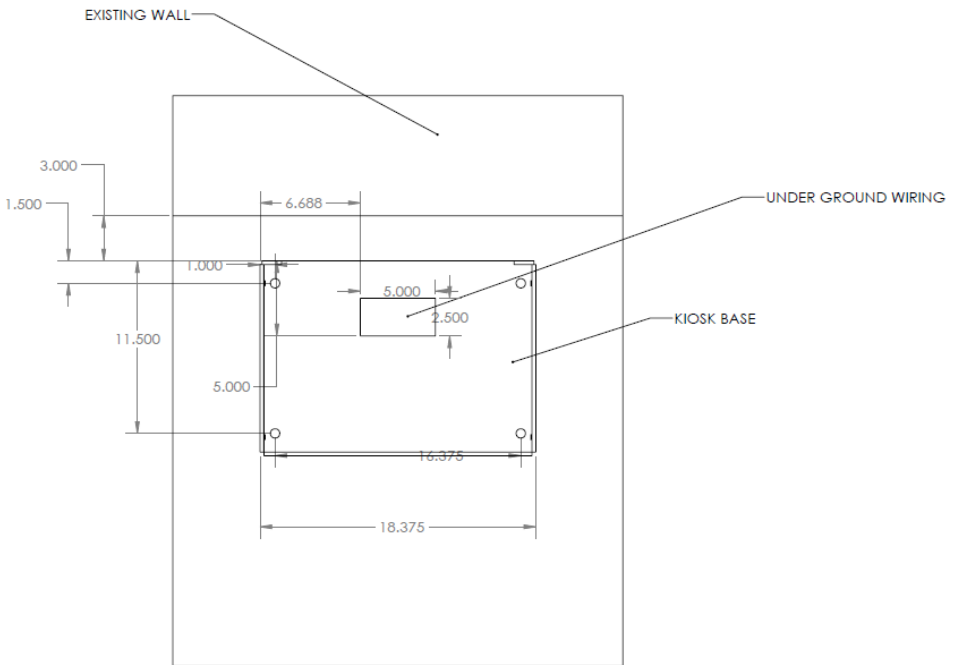


Figure 1: Model 720 Pedestal Base Layout



Model 720 Concrete Pad Specifications

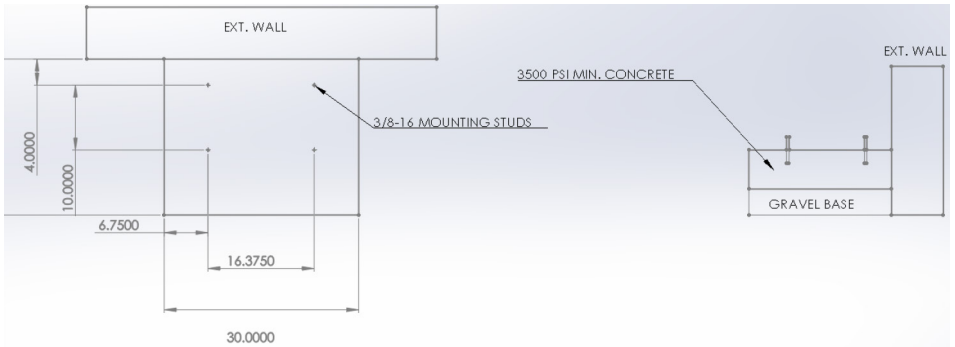


Figure 2: Model 720 Concrete Pad Specifications

Model 720 Corner Mount Placement Considerations (with access door open)

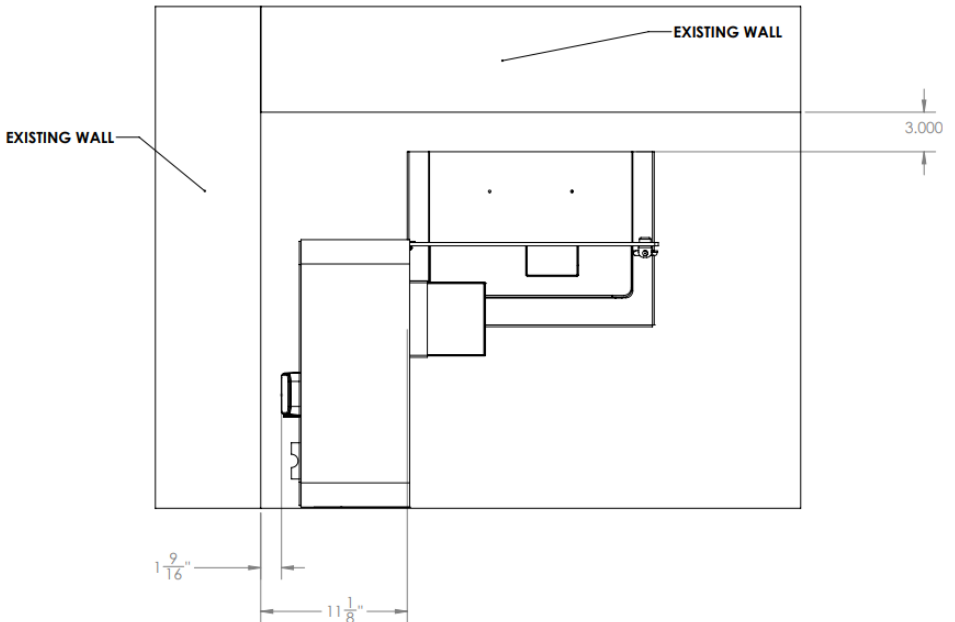


Figure 3: Model 720 Corner Mount Placement Considerations

Model 720 Front View

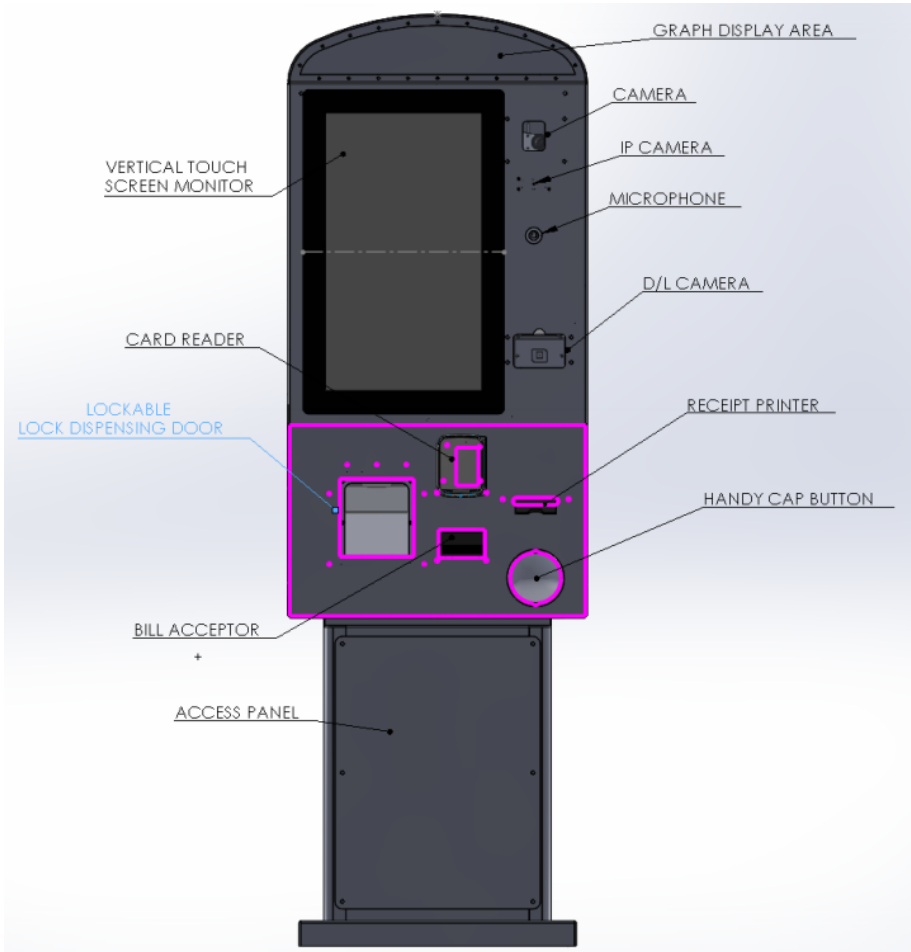


Figure 4: Model 720 Front View



Model 720 ISO View

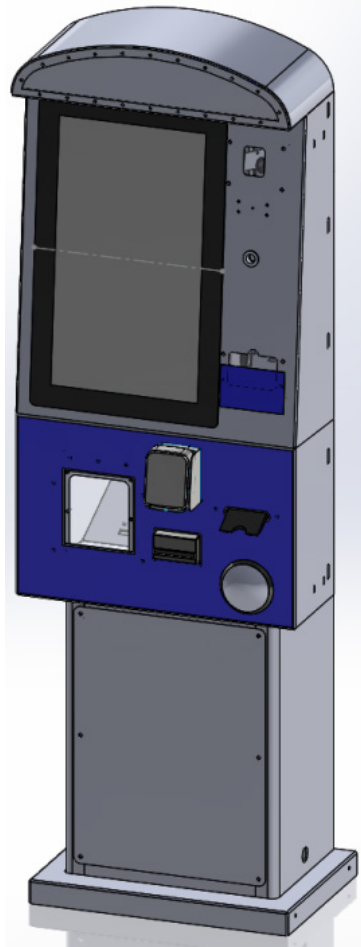


Figure 5: Model 720 ISO View

Model 720 Right Side View

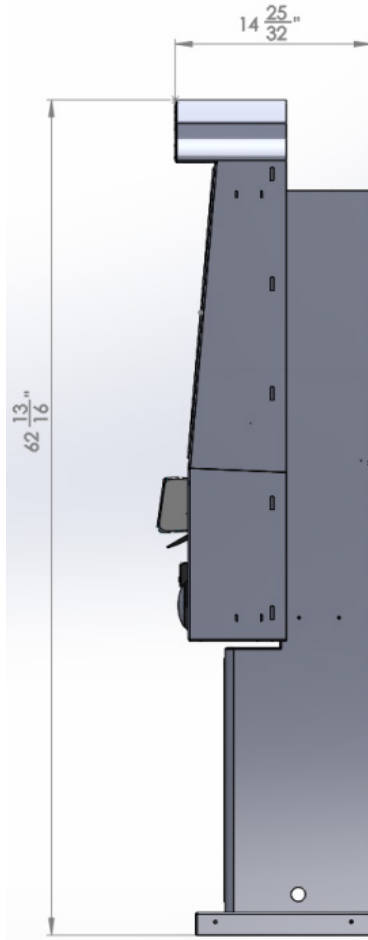


Figure 6: Model 720 Right Side View



Model 720 Front ADA View

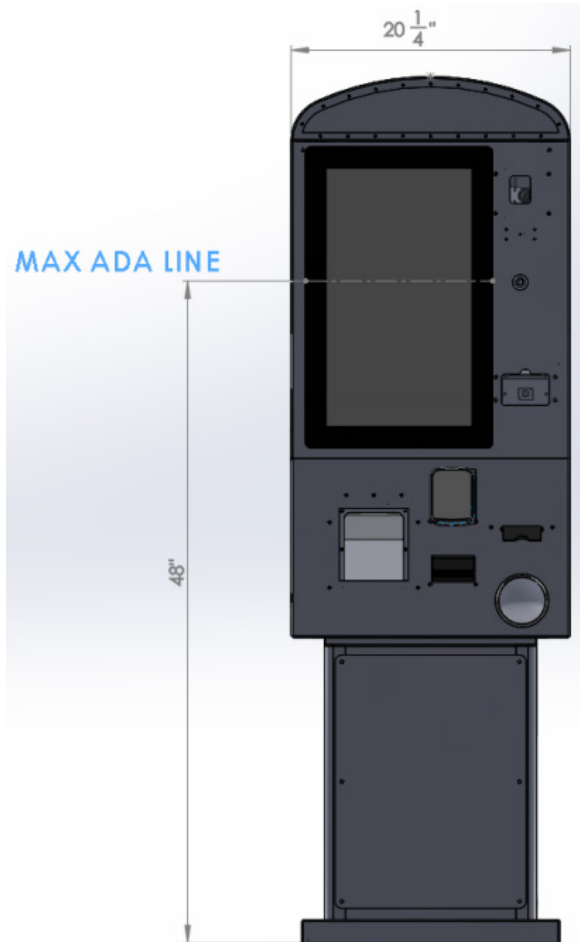


Figure 7: Model 720 Front ADA View

TABLE OF FIGURES

Figure 1: Model 720 Pedestal Base Layout.....	8
Figure 2: Model 720 Concrete Pad Specifications.....	9
Figure 3: Corner Mount Placement Considerations (with access door open).....	9
Figure 4: Model 720 Front View.....	10
Figure 5: Model 720 ISO View.....	11
Figure 6: Model 720 Right Side View.....	12
Figure 7: Model 720 Front ADA View.....	13



The background of the page is a photograph of a storage facility aisle, viewed from a low angle looking down the center. The aisle is lined with rows of blue roll-up storage units. The units are numbered, with numbers 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, and 18 visible. The ceiling is a dark blue, and the floor is a light grey. The lighting is even, creating a clean and professional atmosphere. The logo and text are overlaid on the upper half of the image.

OpenTech Alliance™

 www.OpenTechAlliance.com

 602 749 9370

 support@opentechalliance.com